


TAG: _____

Specifications

NOTE: All dimensions are in mm/inches.

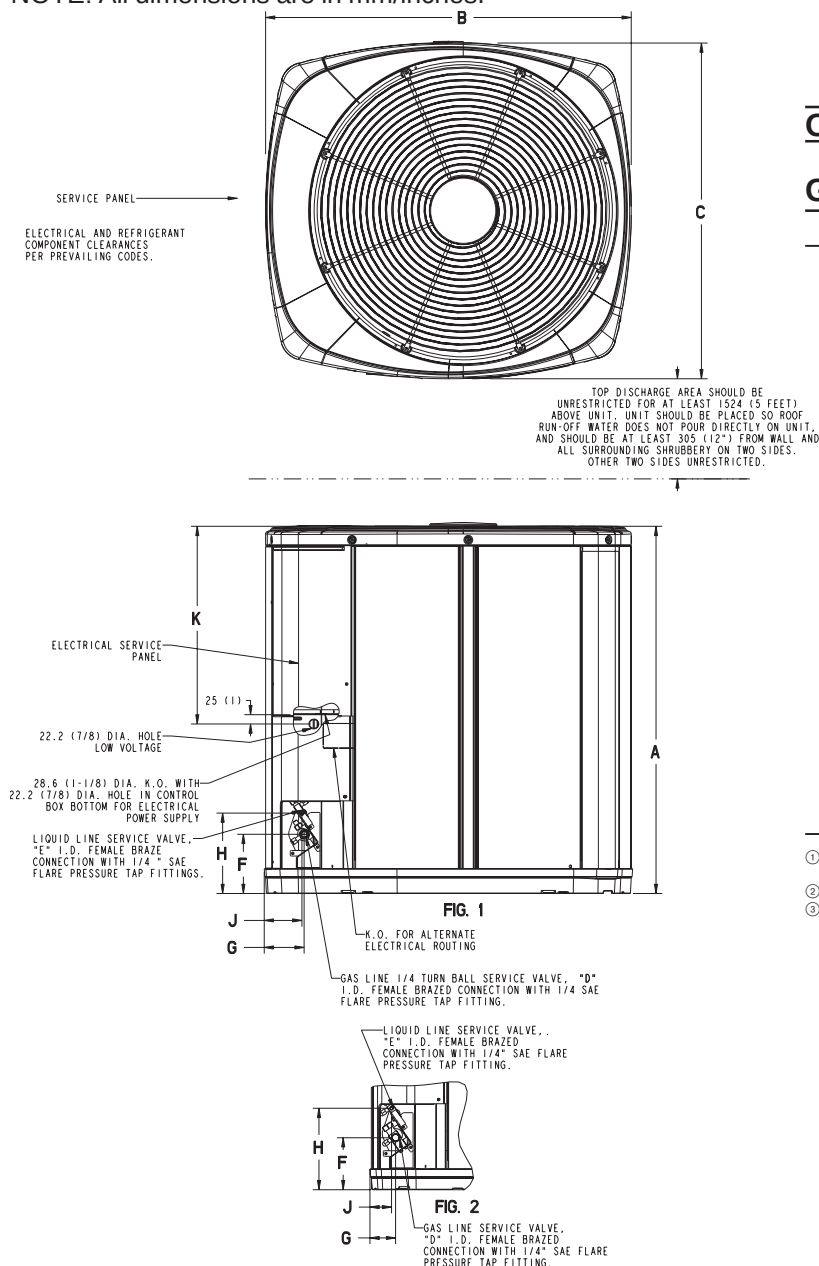

MODELS	BASE	FIG.	A	B	C	D	E	F	G	H	J	K
2A7A4024B	3	2	832 (32-3/4)	829 (32-5/8)	756 (29-3/4)	3/4	5/16	137 (5-3/8)	86 (3-3/8)	210 (8-1/4)	79 (3-1/8)	508 (20)

From Dwg. 21D152862 Rev.17

2 Ton Split System Cooling — 1 Phase

2A7A4024B

Outdoor Unit ①② 2A7A4024B1000A

General Data

Model No. (1)	2A7A4024B1000AA
Electrical Data V/Ph/Hz(2)	200/230/1/60
Min Cir Ampacity	11
Max Fuse Size (Amps)	15
Compressor	DURATION - TM
RL Amps - LR Amps	8.3 - 62
Outdoor Fan FL Amps	0.9
Fan HP	1/8
Fan Dia (inches)	23
Coil	Spine Fin TM
Refrigerant R-22	6/09-LB/OZ
Line Size-(in.) O.D. Gas (3)	3/4
Line Size-(in.) O.D. Liquid (3)	5/16
Dimensions HxWxD (Crated)	38 X 30.1 X 33
Weight-Shipping	224
Weight-Net	197
Start Components	YES
Sound Enclosure	YES
Compressor Sump Heat	YES

- ① Certified in accordance with the Unitary Air-Conditioner equipment certification program which is based on ARI Standard 210/240.
 ② Calculated in accordance with N.E.C. Use only HACR circuit breakers or fuses.
 ③ Standard line lengths - 60'. Standard lift - 60' Suction and Liquid line. For Greater lengths and lifts refer to refrigerant piping software Pub# 32-3312-0'. (*denotes latest revision)



A-weighted Sound Power Level [dB(A)]

MODEL	SOUND POWER LEVEL [dB(A)]	A-WEIGHTED FULL OCTAVE SOUND POWER LEVEL dB - [dB(A)]							
		63	125	250	500	1000	2000	4000	8000
2A7A4024B1	74	49.0	57.4	61.6	67.7	67.4	65.4	57.9	57.7

Mechanical Specification Options

General

These models shall be fully charged from the factory for matched indoor section and up to 15 feet of piping. This unit must be designed to operate at outdoor ambient temperatures as high as 115°F. Cooling capacities shall be matched with a wide selection of air handlers and furnace coils that are ARI certified. The unit shall be UL listed. Exterior must be designed for outdoor application.

Casing

Unit casing is constructed of heavy gauge, galvanized steel and painted with a weather-resistant powder paint finish on all louvered panels. Corrosion and weatherproof CMBP-G30 DuraBase™ base.

Refrigerant Controls

Refrigeration system controls include condenser fan and compressor contactor. High and low pressure controls are inherent to the compressor. Unit also has high pressure switch. Another standard feature is the liquid line drier.

Compressor

The Duration™ compressor features internal over temperature and pressure protector, and dipped hermetic motor. Other features include: roto lock suction and discharge refrigerant connections, centrifugal oil pump, and low vibration and noise. The Duration™ compressor features a 10-year limited warranty.

Condenser Coil

The Spine Fin™ coil shall be continuously wrapped, corrosion resistant all aluminum with minimum brazed joints. This coil is seamless aluminum glued to a continuous aluminum fin. Coils are lab tested to withstand 2,000 pounds of pressure per square inch.

Low Ambient Cooling

As shipped, this unit has a cooling capability to 55°F. The addition of an evaporator defrost control permits operation to 40°F. The addition of an evaporator defrost control with TXV permits low ambient cooling to 30°F.

Accessories

Thermostats — Heat/cooling (manual and automatic changeover). Sub-base to match thermostat and locking thermostat cover.

Evaporator Defrost Control — See Low Ambient Cooling.

Outdoor Thermostat — Supplemental heat outdoor ambient lockout from 46 to -10°F.



*American
Standard*

American Standard Inc.
6200 Troup Highway
Tyler, Texas 75711

4/05

Since the manufacturer has a policy of continuous product and product data improvement, it reserves the right to change design and specifications without notice.